



## Hi-Def Your Vision

SN68SG2

NVIDIA  
**GEFORCE**  
7025



Shuttle SN68SG2 is designed for the latest AM2 multi-core processor platform, and NVIDIA® GeForce® 7025 chipset, deliver best-in-class 3D performance and leading graphics compatibility to play top games the way they are meant to be played. The finest cinematic surround sound effects of SN68SG2 Integrated 7.1 channel high definition audio.

SN68SG2 enhance data transfer through high speed SATA 3Gb/s, and features low noise and ultra cool ICE2 (Integrated Cooling Engine) technology, SN68SG2 is the great business PC.





## SN68SG2

### Supports AM2 Multi-core Processors

The new AM2 platform brings amazing performance for high level gaming and working.



### Supports Windows Vista Premium

Breathtaking Windows Aero™ 3D visual interface and a host of groundbreaking new features, Windows® Vista™ Premium promises to deliver a streamlined computing experience designed to fundamentally change how users view, find and organize their digital information.




### 7.1 Surround Sound

The great quality of video and audio will bring you to imagination.



### Color Slots Design

USB, PCI-E, PCI, DDR2, Easily recognize color codes provides an easier way to install the devices such as Power switch, USB, PCI-E, PCI, DDR2.

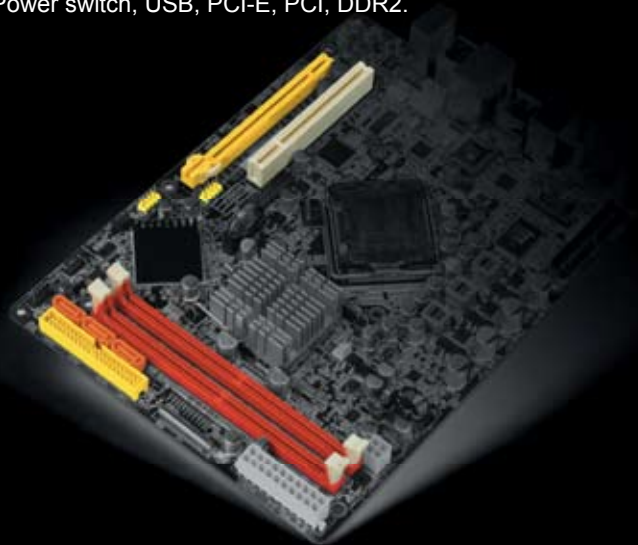

## Specification

### FORM FACTOR

- Shuttle Form Factor 300(L)x200(W)x185(H)mm
- Shuttle "G2" Chassis

### PROCESSOR

- AMD Athlon™ 64 X2 / Athlon™ 64 / Sempron™
- Hyper Transport 1.0 support
- Supports Socket AM2

### CHIPSET

- NVIDIA® GeForce® 7025 / NVIDIA nForce® 630a

### MEMORY

- Dual channel DDR2 533/667/800
- 2 x DIMM slots, 2GB per DIMM (Max 4GB)

### VGA

- Build-in NVIDIA® GeForce® 7025 / NVIDIA nForce® 630a
- NVIDIA® GeForce® 7025 engine
- DirectX 9 support

### AUDIO

- Realtek ALC888
- Supports Analog 7.1 channel output
- Supports Digital S/PDIF in/out

### ETHERNET

- Marvell 88E8116 (PCI-E Interface)
- IEEE 802.3u 1000Base-T compliant
- 10Mb/s, 100Mb/s and 1000Mb/s operation
- Wake-On-LAN support

### STORAGE INTERFACE

- 1\* UltraDMA 133 IDE channel connector
- 2\* On board SATA connectors
- 1\* Floppy connector
- 2\* eSATA connectors in back panel
- NCQ support
- RAID 0,1,0+1,5, JBOD support

### EXPANSION BAY

- 2\* 3.5" bay
- 1\* 5.25" bay

### FRONT PANEL

- 2\* USB 2.0 ports
- 1\* mini IEEE1394
- 1\* Mic in
- 1\* Earphone out
- 1\* Power-on button
- 1\* Reset button
- 1\* Power indicator - blue
- 1\* HDD indicator - orange

### BACK PANEL

- 1\* PCI Express x16 slot
- 1\* PCI slot
- 4\* USB 2.0 ports
- 2\* eSATA ports
- 1\* RJ45 Gigabit Ethernet port
- 1\* D-Sub port
- 1\* IEEE 1394 port
- 1\* Audio Line in connector
- 1\* Audio Front out connector
- 1\* Audio Rear surround connector
- 1\* Audio Side surround connector
- 1\* Audio Center/Bass connector
- 1\* Clear CMOS button
- 1\* SPDIF In / Out port fixture
- 1\* Wireless Antenna fixture
- 1\* Printer Port fixture

### ACCESSORIES

- XPC Multilanguage Quick User Guide
- XPC CD Driver (XP and Vista 32 / 64 bit)
- 1\* Bonus CD(PC-cillin 2007, Adobe Reader 8.1)
- 1\* Power cord
- 1\* IDE cable (pre-install)
- 1\* SATA cable (pre-install)
- 1\* Floppy cable
- Screws
- Heatsink Compound